



SOLITEX EXTASANA ADHERO®

Self-Adhesive Weather Resistive Barrier

- ✓ Fully self-adhered membrane
- ✓ 180 days UV resistance and excellent durability
- ✓ Isolates any leaks caused by penetrations or accidental damage
- ✓ Ideal solution for pre-fab systems

SOLITEX EXTASANA ADHERO® is a UV stabilised and tear resistant weather resistive barrier (WRB). It contains a non-porous, water resistant TEEE film, with a full solid acrylate adhesive back and siliconized release paper.


This product is designed for use in exterior cladding systems and can be fully adhered to rigid substrates, It is suitable for use in BAL regions 12.5 to 40 in accordance with AS 3959.

| ID CODE | LENGTH | WIDTH | AREA | KG/ROLL | QTY |
|----------|--------|-------|-------------------|---------|-----|
| 1AR01968 | 30.0 m | 1.5 m | 45 m ² | 12 | 1 |

TECHNICAL DATA

| | | |
|------------------------------------|-----------------------|--------------------|
| UV stability and outdoor exposure: | 180 days | ASTM G154 |
| Duty classification: | Depends on substrate* | AS/NZS 4200.1-2017 |
| Vapour classification: | Depends on substrate* | AS/NZS 4200.1-2017 |
| Flammability index: | < 5 | AS 1530.2-1993 |
| Thickness: | 0.70 mm ± 0.05 mm | EN 1489-2 |
| Temperature resistance: | -40 °C to +100 °C | |
| Heat shrinkage @ 70°C: | 0.0% | ASTM D1204 |
| Water control: | 10,000 mm | EN 20811 |
| | Pass (> 100 mm) | AS/NZS 4201.4-1994 |
| | Water barrier | AS/NZS 4200.1-2017 |

*Performance characteristics will be modified by the rigid substrate

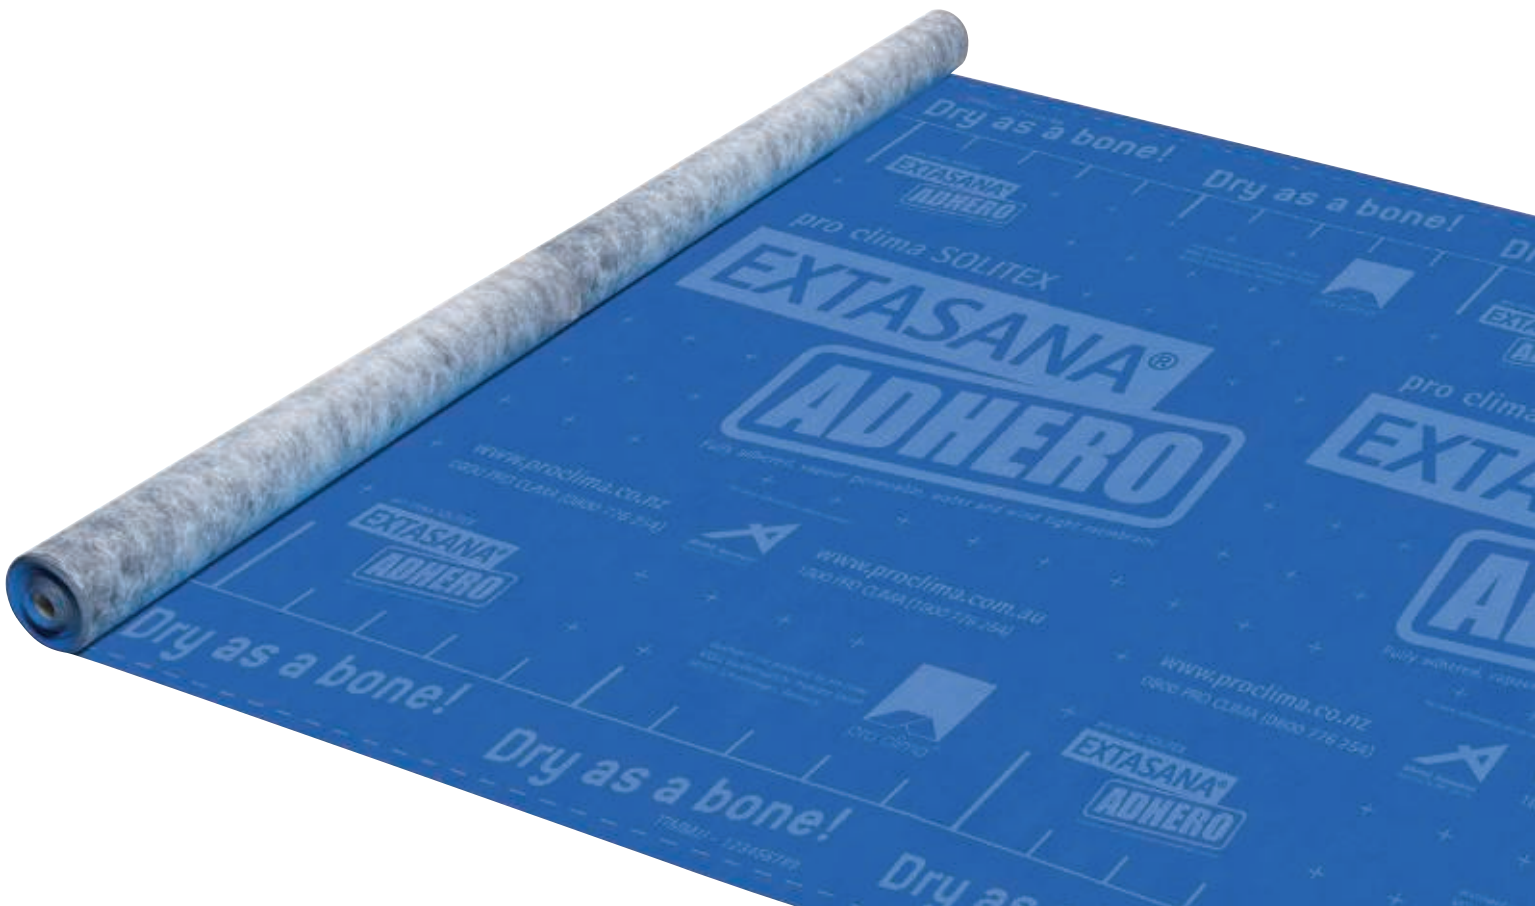



Weather Resistive Barrier System by pro clima

SOLITEX EXTASANA ADHERO®

Self-Adhesive Weather Resistive Barrier

KAFLEX mono/duo

Cable Sealing Grommet

TESCON EXTORA®

Weathertight Sealing Tape

CONTEGATM EXO

Joinery Connection Strip - Exterior

TESCON EXTOSEAL®

Sill Tape

ROFLEX

Sealing Grommets for Pipes

Rigid Air Barrier

TESCON® PRIMER RP

Solvent-Free Primer

