



SOLITEX MENTO® PLUS

Roof Weather Resistive Barrier

- ✓ 180 days UV resistance with long term durability
- ✓ Highly vapour permeable (Class 4)
- ✓ Weathertight and airtight weather resistive barrier (WRB)
- ✓ Helps protect building from condensation

SOLITEX MENTO® PLUS is a UV stabilised and tear resistant weather resistive barrier (WRB). It contains a non-porous, water resistant TEEE film that is laminated at high temperatures between two layers of spun bonded polypropylene, and also has an added scrim for extra strength.

This product is suitable for use in tile, metal and slate roof applications and it is suitable for use in BAL regions 12.5 to 40 in accordance with AS 3959.

TECHNICAL DATA

UV stability and outdoor exposure:	180 days	ASTM G154
Duty classification:	Medium	AS/NZS 4200.1-2017
Vapour classification:	Class 4 (Permeable)	AS/NZS 4200.1-2017
Flammability index:	< 5	AS 1530.2-1993
Thickness:	0.60 mm ± 0.1 mm	EN 1489-2
Temperature resistance:	-40 °C to +100 °C	
Heat shrinkage at 70°C: MD/LD	0.4% / 0.0%	ASTM D1204
Water control:	> 2,500 mm	EN 20811
	Pass (> 100 mm)	AS/NZS 4201.4-1994
	Water barrier	AS/NZS 4200.1-2017

ID CODE	LENGTH	WIDTH	AREA	KG/ROLL	QTY
1AR02396	50 m	1.50 m	75 m ²	13	1
1AR02494	50 m	3.00 m	150 m ²	26	1
1AR02493 (connect)	50 m	1.50 m	75 m ²	13	1

Also available: **connect** -technology with two integrated self-adhesive strips






Weather Resistive Barrier System

by pro clima

SOLITEX
MENTO PLUS®
Roof Weather Resistive Barrier

TESCON EXTORA®
Weathertight Sealing Tape

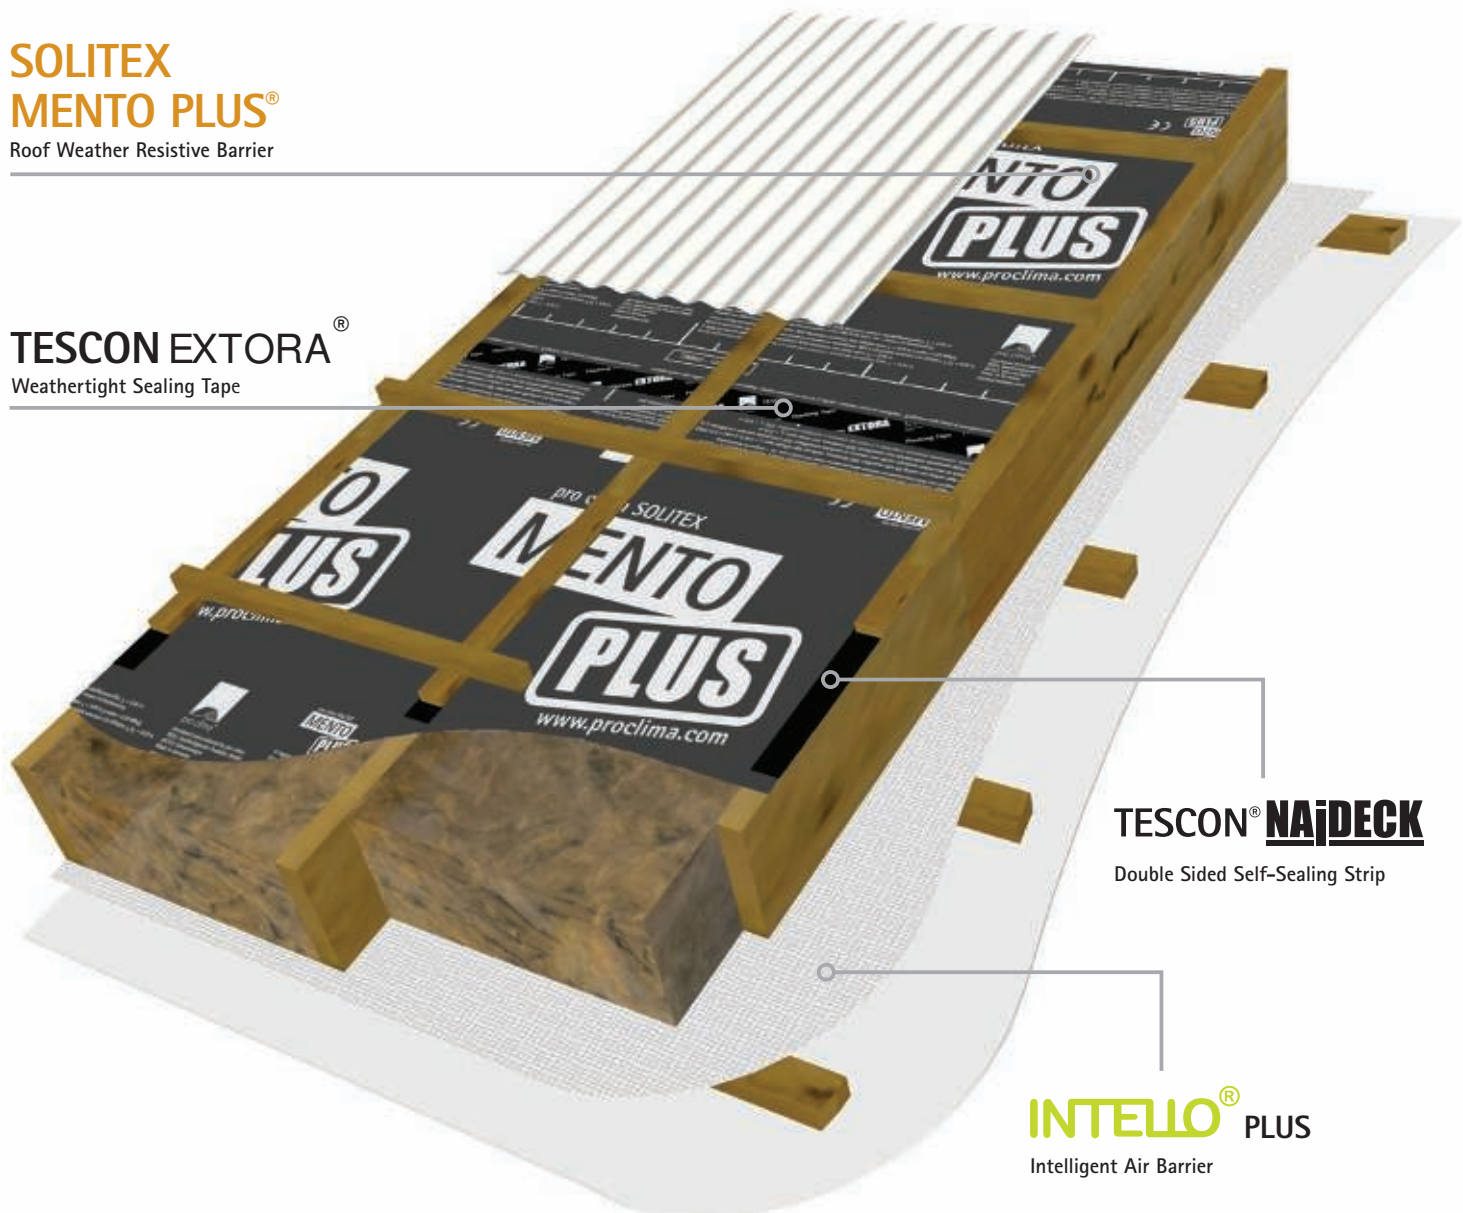

TESCON® NAIDECK
Double Sided Self-Sealing Strip

INTELLO® PLUS
Intelligent Air Barrier

